



Recorder



Flow



Pressure



Temp



Analyzer



Level

Datasheet

Electromagnetic Flowmeter

SUP-A100D

Supmea[®]

Committed to process automation solutions

E-mail: info@supmea.com

www.supmea.com

Datasheet**Electromagnetic Flowmeter
SUP-A100D**

The electromagnetic flowmeter is designed based on the Faraday electromagnetic induction principle and used to measure the instantaneous flow rate of conductive liquids in enclosed pipelines in flammable and explosive environments. During on-site monitoring and display, standard current signals, pulse signals, and RS485 digital signals can be output for recording, adjustment, and control, achieving automatic detection and control. It can be widely used in industries such as tap water, chemical industry, coal, environmental protection, light textile, metallurgy, papermaking, etc.

Applications

- Tap water
- Chemical industry
- Coal
- Environmental protection
- Light textile
- Metallurgy
- Paper-making

Features


- Certified to multiple universal explosion-proof (Ex) standard.
- Delivers reliable measurements with high accuracy and excellent stability.
- Integrated design with no moving parts; easy to install and maintenance-free.
- Equipped with an RS485 communication interface supporting the standard Modbus RTU protocol.
- Measures flow accurately in both directions, unaffected by fluid flow direction.
- Adopting advanced low-frequency square-wave excitation for stable zero-point performance, strong anti-interference capability, and reliable operation.
- Touch-sensitive buttons enable lid-free operation.
- Adjustable display orientation for easy reading.
- Built in bilingual (Chinese/English) interface allows seamless language switching.

**Electromagnetic Flowmeter**

Principle

The operating principle of electromagnetic flowmeter is based on Faraday's law of electromagnetic induction. The two electromagnetic coils at the upper and lower ends as shown in Figure 3 generate a constant or alternating magnetic field. When the conductive medium flows through the electromagnetic flowmeter, the induced electromotive force can be detected between the left and right electrodes on the wall of the flowmeter tube. The magnitude of the induced electromotive force is proportional to the electrically conductive medium flow rate, the magnetic induction density of the magnetic field, and the width of the conductor (the inner diameter of the flowmeter measuring tube), and the flow rate of the medium can be obtained by calculation. The induced electromotive force equation is as follows:

$$E=K \times B \times V \times D$$

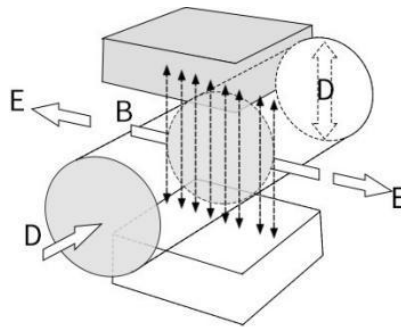


When measuring the flow, the fluid flows through a magnetic field which is perpendicular to the flow direction. The flow of conductive fluid induces a potential proportional to the average flow velocity, thus requiring the conductivity of the measured flowing liquid to be higher than the minimum conductivity. The induced voltage signal is detected by two electrodes and transmitted to the converter via a cable. After a series of analog and digital signal processing, the accumulated flow and real-time flow are displayed on the display of the converter.

Parameters			
Input			
Measured variable	Direct measured variables: Flow velocity Calculated measured variables: Volume flow , mass flow.		
Velocity of flow	Typically Velocity of flow: 0.5m/s~5m/s		
Nominal diameter	DN15~DN300		
Flow range	Nominal diameter	Min value (m³/h)	Max value (m³/h)
	DN15	0.32	3.2
	DN20	0.56	5.6
	DN25	0.88	8.8
	DN32	1.4	14
	DN40	2.3	23
	DN50	3.5	35
	DN65	6	60
	DN80	9	90
	DN100	14	140
DN125	22	220	

	DN150	32	320	
	DN200	56	560	
	DN250	88	880	
	DN300	127	1270	
Range ratio	1: 10			
Output				
Current output	Function	Measurement of volume and quality (in the case of constant density)		
	Setting	Scope	(4~20)mA	
		Max	20mA	
		Min	4mA	
	Internal voltage	24VDC		
Load	≤750Ω			
Pulse output	Function	Set up Pulse output		
	Pulse output		$F_{max} \leq 5000$ cp/s Output pulse width: 0.1ms ~2000ms	
		Basis	(This value is lower than the maximum duty cycle, with a maximum duty cycle of 1:1	
			$F_{max} \leq 5000$ cp/s	
		Pulse coefficient	0.001~100000/unit	
	Passive	$U_{Internal} \leq 24VDC$		
Active	$U_{Internal} \leq 24VDC$ $I \leq 4.52mA$			
Communications	RS485 serial , MODBUS-RTU communication protocol			
Power supply				
Supply voltage	100VAC~230VAC, 50/60Hz; 20VDC~28VDC			
Power consumption	≤15W			
Terminals	Screw type terminal block, maximum wire diameter 2.5mm ²			
Cable entries	M20*1.5 or NPT1/2			
Supply voltage	100VAC~230VAC, 50/60Hz; 20VDC~28VDC			
Performance characteristics				
Reference operating conditions	Medium: water			
	Temperature: 20℃			
	Pressure: 0.1MPa			
	Installation requirements: Inlet run≥10DN, Outlet run≥5DN			
Accuracy	Measurement value±0.5%(Flow velocity 0.5m/s~5m/s)			
Repetitiveness	0.16%			

Maximum measured error

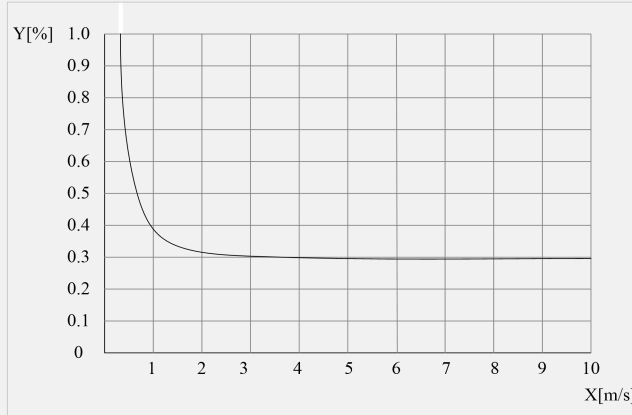

- ① X[m/s]: Velocity of flow
- ② Y[%]: Actual measured value deviation

Process

Medium temperature range	Polyurethane rubber (PU): -10°C~60°C Chloroprene rubber (CR): -10°C~70°C PTFE/F46: -10°C~120°C
Pressure rating (High pressure can be customized)	DN15~DN250: PN<1.6MPa DN300: PN<1.0MPa Note: (If there are differences in the selection of individual specifications, the label shall prevail, and high-pressure can be customized)
Conductivity	≥50μS/cm

Environment

Ambient temperature	-10°C~55°C
Storage temperature	-20°C~55°C
Protection level	IP65

Explosion-proof parameters


Ex symbol	Ex db ib IIC T6...T4 Gb Note: The product is a flameproof intrinsic safety composite explosion-proof type. The product header is designed with explosion-proof structure, the sensor measuring electrode part is designed with intrinsic safety, and the intrinsic safety circuit is an internal circuit with no external output.
-----------	--


Temp group	Lining material	Medium temperature [°C]		
		T6[85°C]	T5[100°C]	T4[135°C]
	PU	-10~60	-10~60	-10~60
	CR	-10~60	-10~70	-10~70
	PTFE、F46	-10~60	-10~75	-10~120

Cable introduction Installation Requirements: Note: During the installation and use of the product, corresponding measures should be taken to ensure that the temperature at the neck of the sensor does not exceed 75°C

Cable introduction Installation Requirements: During product installation and use, it is necessary to select or prepare cable entry devices that comply with the requirements of GB/T 3836.1-2021 and GB/T 3836.2-2021 standards and bear the explosion-proof marking Ex db IIC Gb.

Wiring

Terminal	Description
L, N	100VAC~230VAC, 50/60Hz;
24V+; 24V-	20VDC~28VDC
485A, 485B	RS485 serial communication
IOUT, ICOM	(4~20)mA output
POUT, PCOM	Pulse output
	Protection grounding for converter

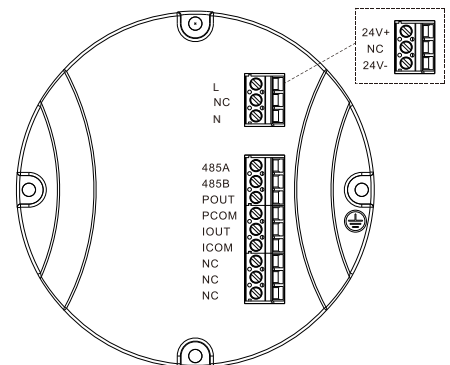

Dimension

Sensor Dimensions

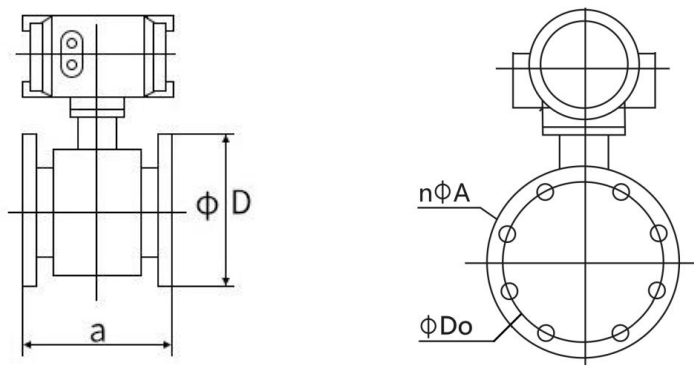


Fig.1 Sensor appearance diagram

Table 1 Sensor dimensions (HG/T 20592 flange)

DN	a	D	Do	n*A	Pressure resistance
15	200	95	65	4*14	1.6MPa
20	200	105	75	4*14	1.6MPa
25	200	115	85	4*14	1.6MPa
32	200	140	100	4*18	1.6MPa
40	200	150	110	4*18	1.6MPa
50	200	165	125	4*18	1.6MPa
65	200	185	145	4*18	1.6MPa
80	200	200	160	8*18	1.6MPa
100	250	220	180	8*18	1.6MPa
125	250	250	210	8*18	1.6MPa
150	300	285	240	8*22	1.6MPa
200	350	340	295	12*22	1.6MPa
250	450	405	355	12*26	1.6MPa
300	500	445	400	12*22	1.0MPa

Table 2 Sensor dimensions (JB/T 81 flange)

DN	a	D	Do	n*A	Pressure resistance
10	200	90	60	4*14	1.6MPa
15	200	95	65	4*14	1.6MPa
20	200	105	75	4*14	1.6MPa
25	200	115	85	4*14	1.6MPa
32	200	135	100	4*18	1.6MPa
40	200	145	110	4*18	1.6MPa
50	200	160	125	4*18	1.6MPa
65	200	180	145	4*18	1.6MPa
80	200	195	160	8*18	1.6MPa
100	250	215	180	8*18	1.6MPa
125	250	245	210	8*18	1.6MPa
150	300	280	240	8*23	1.6MPa
200	350	335	295	12*23	1.6MPa
250	450	405	355	12*25	1.6MPa
300	500	440	400	12*23	1.0MPa

Table 3 Sensor dimensions (GB/T 9124 flange)

DN	a	D	Do	n*A	Pressure resistance
10	200	90	60	4*14	1.6MPa
15	200	95	65	4*14	1.6MPa
20	200	105	75	4*16	1.6MPa
25	200	115	85	4*16	1.6MPa
32	200	140	100	4*18	1.6MPa
40	200	150	110	4*18	1.6MPa
50	200	165	125	4*20	1.6MPa
65	200	185	145	8*20	1.6MPa
80	200	200	160	8*20	1.6MPa
100	250	220	180	8*22	1.6MPa
125	250	250	210	8*22	1.6MPa
150	300	285	240	8*24	1.6MPa
200	350	340	295	12*26	1.6MPa
250	450	405	355	12*29	1.6MPa
300	500	445	400	12*26	1.0MPa

Converter Dimensions

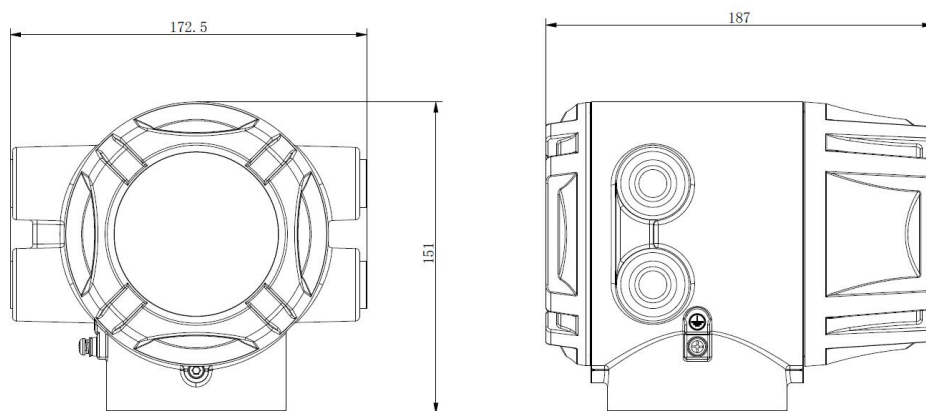


Fig.2 Converter dimensions (Unit: mm)

Ordering code

SUP-A100D-15-20-25-32-40-50-65-80-1C-1E-1G-2C-2G-3C-J-H-XX-B-C-XX-K-AA-A														Description	
M-M3-MF-MG-T1-T2-MH-N6-N1-N2-N7-WA-W7-PB-PC-PE-PR-PU-PT															
SUP-FMX470	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Nominal diameter	15														DN15(1/2")
	20														DN20(3/4")
	25														DN25(1")
	32														DN32(1.25")
	40														DN40(1.5")
	50														DN50(2")
	65														DN65(2.5")
	80														DN80(3")
	1C														DN100(4")
	1E														DN125(5")
	1G														DN150(6")
	2C														DN200(8")
	2G														DN250(10")
	3C														DN300(12")
Process connection	J														JB/T 81 Flange
	H														HG/T 20592 Flange
	XX													Other	
Nominal pressure	B														PN10
	C														PN16
	XX														Other
Process connection material and body material	MC														Carbon Steel CS
	M1														304SS
	XX														Other
Accuracy															Level 0.5
Output and power supply															4-20mA+pulse+RS485, 220VAC
															4-20mA+pulse+RS485, 24VDC
Electrode Materials															316LSS
															Hastelloy B
															Hastelloy C
															Titanium (Ti)
															Tantalum (Ta)
															Pt-Ir

Lining material	N6		PTFE
	N1		Neoprene CR
	N2		Polyurethane PU
	N7		FEP (F46)
Electrical interface, housing material and protection level	WA		Integrated version, M20×1.5 cable gland, aluminum alloy, IP65
	W7		Integrated version, NPT1/2 cable gland, aluminum alloy, IP65
Additional options			
Accessories	PB		Paired flange carbon steel CS
	PC		Paired flange 304SS
	PE		Paired grounding ring 316LSS
	PR		M20×1.5 explosion-proof connector
	PU		NPT1/2 explosion-proof connector
	PT		Tag Nameplate 304SS